
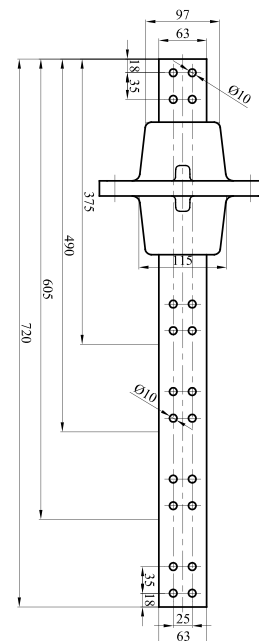
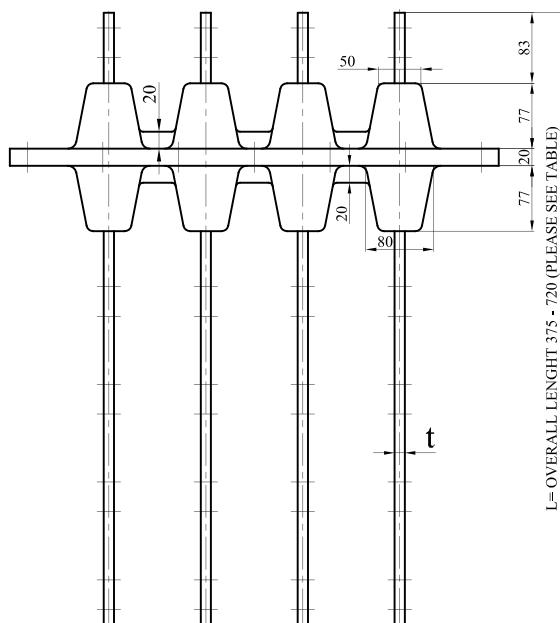





GENERAL MONOBLOCK SELECTION (Up to 2500A)

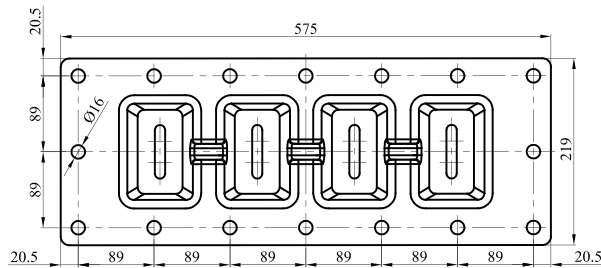

GENERAL MONOBLOCK SELECTION TABLE (Up to 2500A)

Conductor Code	Cast Resin Monoblock Code														Conductor Details				
	TK- MN 170001	TK- MN 170002	TK- MN 170003	TK- MN 170004	TK- MN 170005	TK- MN 170006	TK- MN 170007	TK- MN 250001	TK- MN 250002	TK- MN 250003	TK- MN 250004	TK- MN 250005	TK- MN 250006	TK- MN 250007	L (mm)	t (mm)	Base Standart	Current (Max.)	T-Off
TK-CU375-12	4	1													375	12	BS 2562 EN 50336	1700 A	1
TK-CU490-12		3	4	1		1									490	12			2
TK-CU605-12				3	4										605	12			3
TK-CU720-12						3	4								720	12			4
TK-CU375-20								4	1						375	20	BS 2562 EN 50336	2500 A	1
TK-CU490-20									3	4	1		1		490	20			2
TK-CU605-20											3	4			605	20			3
TK-CU720-20													3	4	720	20			4

GENERAL MONOBLOCK SELECTION (Up to 4000A)

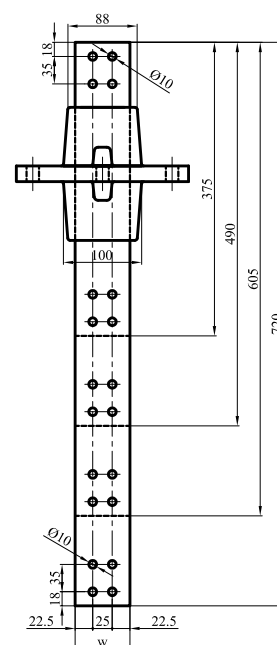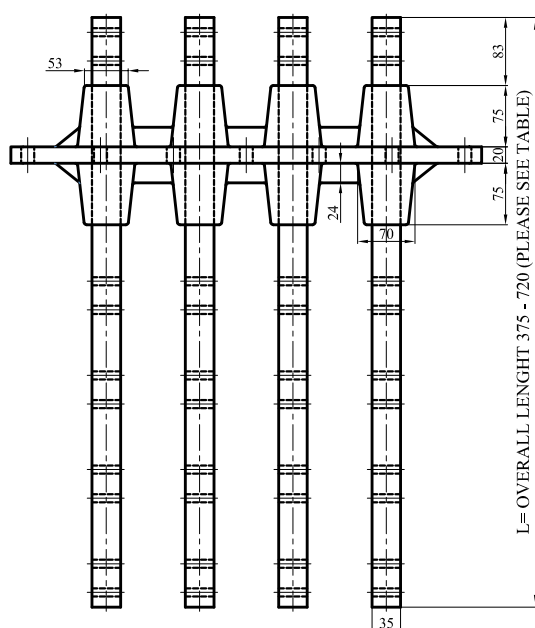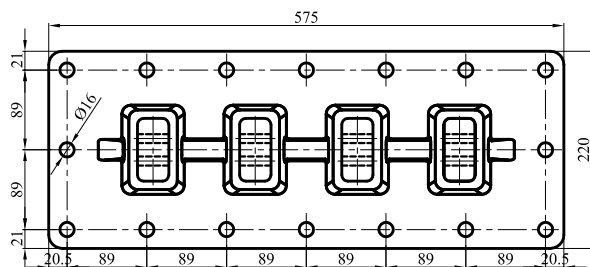

GENERAL MONOBLOCK SELECTION TABLE (Up to 4000A)

Conductor Code	Cast Resin Monoblock Code														Conductor Details				
	TK- MN 315001	TK- MN 315002	TK- MN 315003	TK- MN 315004	TK- MN 315005	TK- MN 315006	TK- MN 315007	TK- MN 400001	TK- MN 400002	TK- MN 400003	TK- MN 400004	TK- MN 400005	TK- MN 400006	TK- MN 400007	L (mm)	W (mm)	Base Standart	Current (Max.)	T-Off
TK-CU375-63	4	1													375	63	BS 2562 EN 50336	3150 A	1
TK-CU490-63		3	4	1		1									490	63			2
TK-CU605-63				3	4										605	63			3
TK-CU720-63						3	4								720	63			4
TK-CU375-70								4	1						375	70	BS 2562 EN 50336	4000 A	1
TK-CU490-70									3	4	1		1		490	70			2
TK-CU605-70											3	4			605	70			3
TK-CU720-70													3	4	720	70			4