



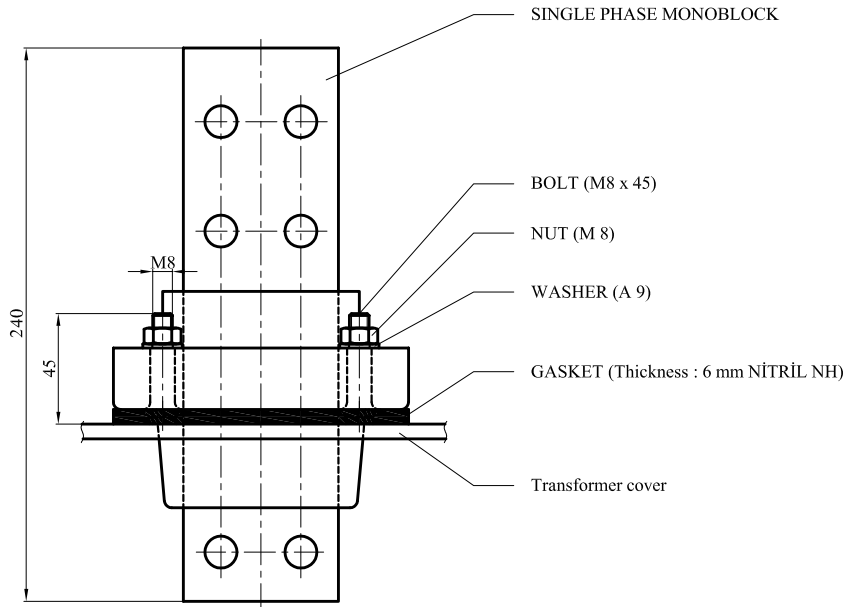


TECHNICAL SPECIFICATIONS

TK-SM 1kV/1250A

Nominal Current: 1250A
 Nominal Voltage: 1 kV Dry Power
 Frequency: 10 kV Dry Lighting Impuls
 Withstand Voltage: 20kV Operating
 Temperature: -20°C÷100°C

ASSEMBLING INSTRUCTIONS

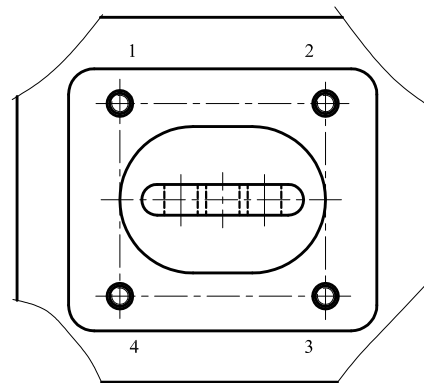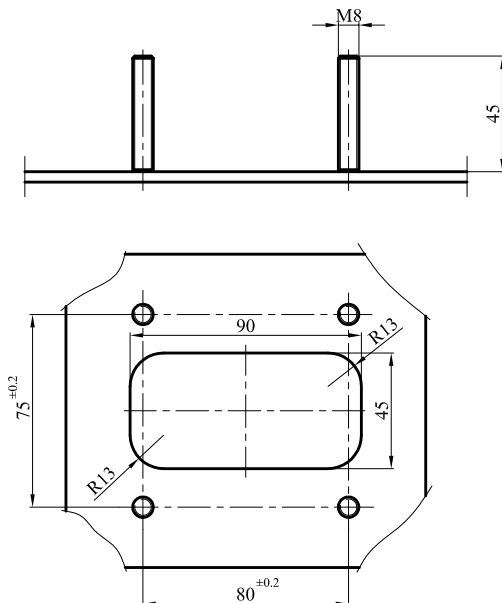

Assembling instructions:
 Screw the 4xM8 nuts according to a cross
 sequence 1-3-4-2
 1st step: 2 Nm
 2nd step: 5 Nm
 3rd step: 12 Nm (max)

■ Upper Assembling Instructions can be used for TK-SM 1kV/ 1250A-1600A-2000A-2500A.