



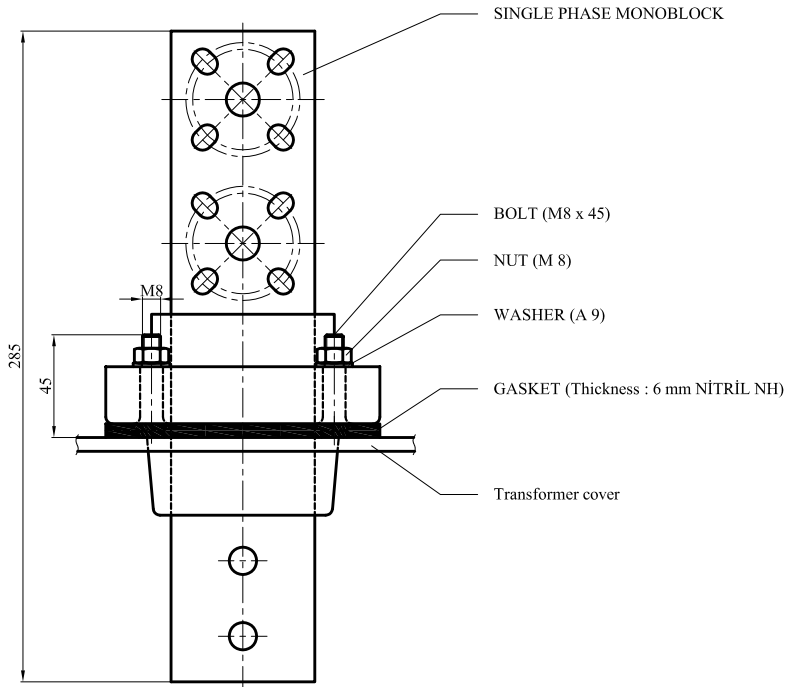


TECHNICAL SPECIFICATIONS

TK-SM 1kV/2000A

Nominal current: 2000 A
 Nominal voltage: 1 kV
 Dry power frequency: 10 kV
 Dry lighting impulse withstand voltage: 20 kV
 Min creepage distance: 55 mm
 Max operating cantilever load: 1000 N
 Thermal short time current withstand test: 29 kA
 Dynamic short circuit current withstand test: 72.5 kA
 Operating temperature: -20°C÷100°C

ASSEMBLING INSTRUCTIONS

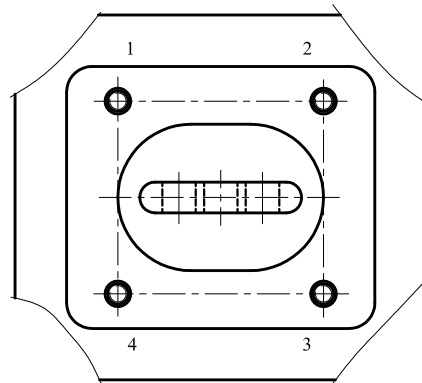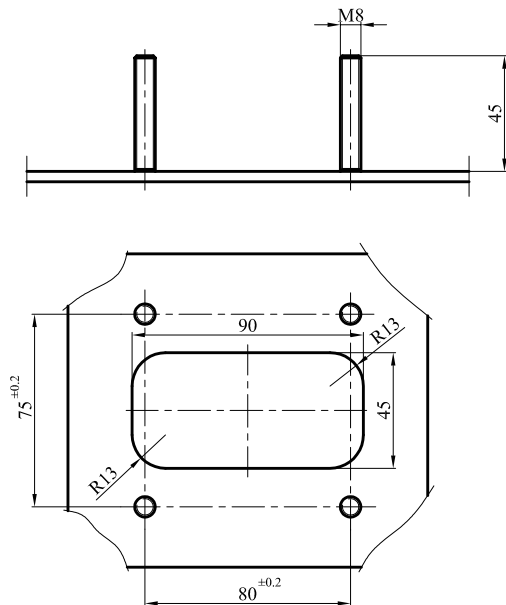

Assembling instructions:
 Screw the 4xM8 nuts according to a cross
 sequence 1-3-4-2
 1st step: 2 Nm
 2nd step: 5 Nm
 3rd step: 12 Nm (max)

■ Upper Assembling Instructions can be used for TK-SM 1kV/ 1250A-1600A-2000A-2500A.