
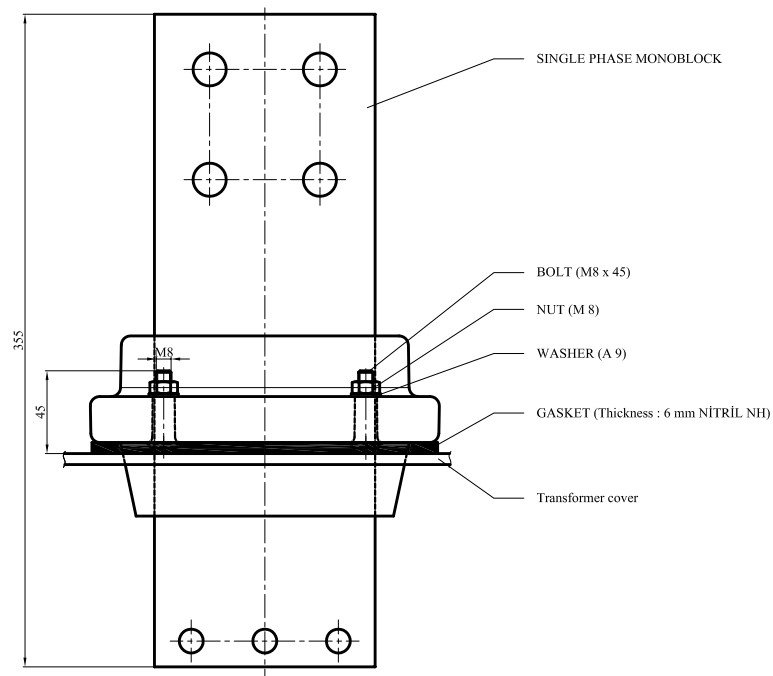


**TECHNICAL SPECIFICATIONS****TK-SM 1kV/4000 A**

Nominal current: 4000 A
Nominal voltage: 1 kV
Dry power frequency: 10 kV
Dry lighting impulse withstand voltage: 20 kV
Operating temperature: -20°C÷100°C
Cooper Dimensions: 120 x 20 mm

ASSEMBLING INSTRUCTIONS

Assembling instructions:
Screw the 4xM8 nuts according to a cross sequence 1-3-4-2
1st step: 2 Nm
2nd step: 5 Nm
3rd step: 12 Nm (max)

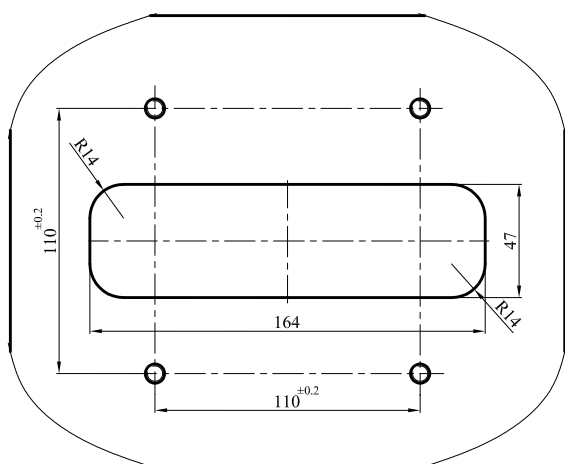